


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 21 TOWNSHIP 17 RANGE 3
DATE: ---3-16-99--- 10-10-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 8-17-94

IN. S.P.C. E ZONE, NAD 83
NAME: 17032102
N: 517888.4720(m)
E: 54952.9990(m)

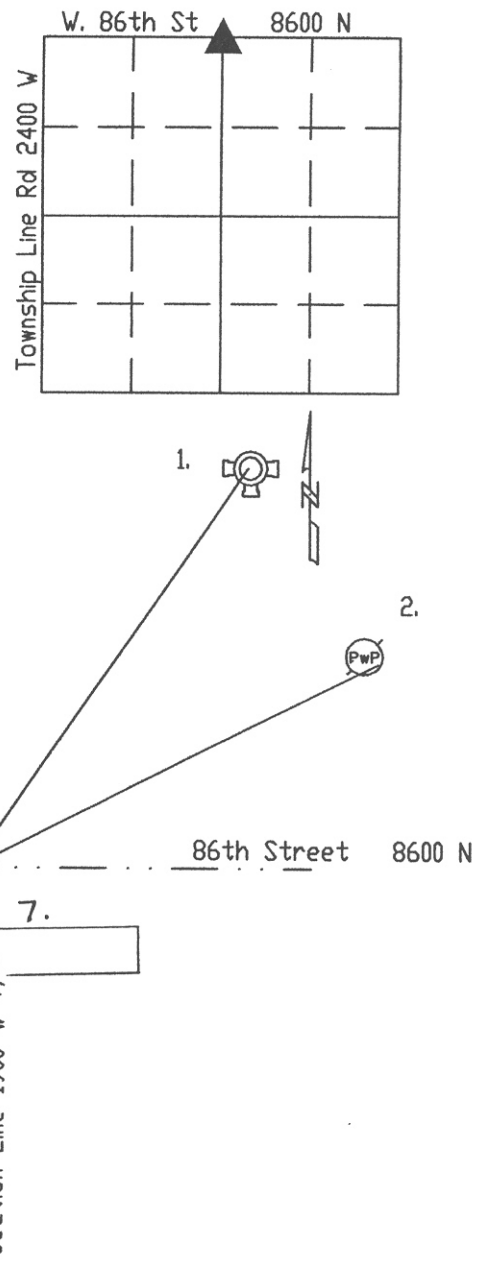

Original post set 1820 by Laughlin with witnesses: 20' ash N 13 W 27 links, and 18' hickory S 47 E 25 links per Marion County Atlas pg. 8. No monuments nor witnesses recorded per township books. Woerner 6-22-48 called brass plug. Miller 3-2-76 called same. Greene 3-11-88 called same. excavated by Kiste 8-17-94 and set Harrison in accordance with the 86th Street construction project. Re-tied 3-16-99 by Wilcoxon.

Hc732102

REF.	DISTANCE	DESCRIPTION
1.	65.56'	Top nut of fire hydrant
2.	61.53'	PK nail E PwP#204-202A 12'up
3.	71.16'	PK nail SE PwP#9-202B 12'up
4.	107.05'	Cut 'x' SE-bolt signal post
5.	108.29'	Due W to iron pin in steel box C/L monument 1900 W
6.	88.61'	Cut 'x' NE-bolt signal post
7.	5.53'	Cut 'x' in median
8.	55.25'	Cut 'x' in median